POWER-LITE™

CIRCULAR LED LIGHT PANEL

CP

Product Facts

Save energy and cost: i.e. 16W LED replaces a 32W compact flourescent fitting, reducing the energy consumption by over 50% per unit.

Call today: For a quote or a free energy assessment/payback plan: **1800 909 306** or email: **sales@nedlandsgroup.com.au**.

5 year warranty: Truly delivering your return on investment.

Approved: SAA/C-tick (RCM), RoHS, CE.

Healthy: No IR or UV Radiation.

Hassle free: Fits into ceiling penetration, exactly as a downlight.

Where: Office, Healthcare, Retail, Recreation, Restaurant, Domestic and Commercial.

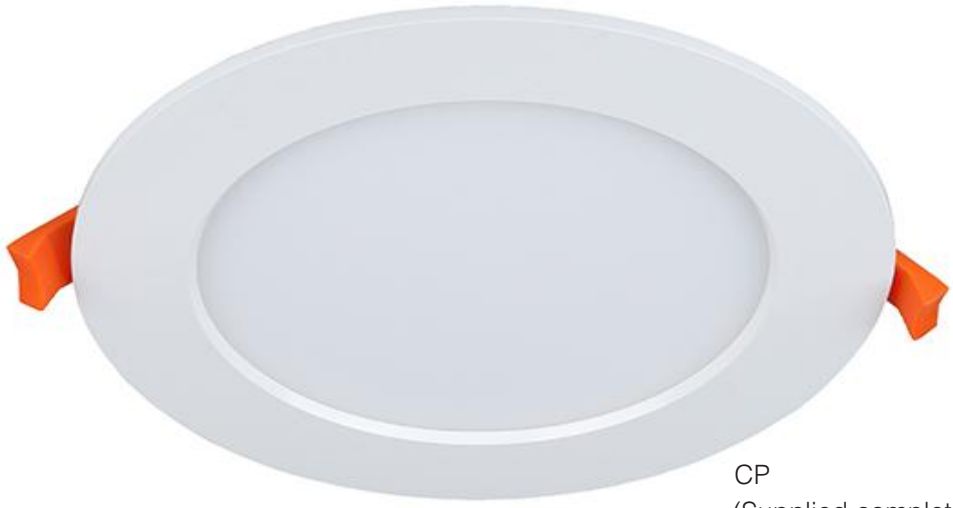

CP
(Supplied complete with driver & plug).

Why POWER-LITE™ LED

POWER-LITE™ LED Circular Light Panel Installation

(Office fit-out 120 Luminaires)

Power Consumption (5 days a week 10 hours a day for 1 year): $1,686.00

Conventional Compact Fluorescent Modular Fitting Installation

(Office fit-out 120 Luminaires)

Power Consumption (5 days a week 10 hours a day for 1 year): $3,372.00

Total yearly saving for office areas: $1,686.00

CLICK HERE TO: ORDER | REQUEST FURTHER INFO | DOWNLOAD PHOTOMETRIC DATA

NEDLANDS GROUP

Free Call 1800 909 306
Fax +61 3 8669 4097
Website nedlandsgroup.com.au
Sales sales@nedlandsgroup.com.au
Service service@nedlandsgroup.com.au

POWER-LITE™

CIRCULAR LED LIGHT PANEL

CP

Key Benefits

- The POWER-LITE™ LED range has been developed over the past 6 years, working closely with the production team to bring an energy saving lighting solution within your reach.
- Slimline, compact design makes the installation easy and improves the aesthetics of the project.
- With our global certification process, this product carries CE, RoHS, SAA/C-tick (RCM) certification, ensuring compliance.
- The POWER-LITE™ 5 year Circular Light Panel warranty is provided to ensure peace of mind and truly delivers your return on investment, whether utilising these units in new installations or retrofit projects.

Specifications & Dimensions

	CP16W-CW	CP16W-NW	CP16W-WW	CP20W-CW	CP20W-NW	CP20W-WW
Power:	16W	16W	16W	20W	20W	20W
Approvals:	SAA/C-tick (RCM), RoHS, CE	SAA/C-tick (RCM), RoHS, CE	SAA/C-tick (RCM), RoHS, CE	SAA/C-tick (RCM), RoHS, CE	SAA/C-tick (RCM), RoHS, CE	SAA/C-tick (RCM), RoHS, CE
LED Chip:	Epistar	Epistar	Epistar	Epistar	Epistar	Epistar
Lumens:	1610 LM	1590 LM	1470 LM	2210 LM	2200 LM	2050 LM
Beam Angle:	120°	120°	120°	120°	120°	120°
IP Rating:	IP54	IP54	IP54	IP54	IP54	IP54
Size:	Ø190 x 33mm	Ø190 x 33mm	Ø190 x 33mm	Ø230 x 33mm	Ø230 x 33mm	Ø230 x 33mm
Cut Out:	160-170mm	160-170mm	160-170mm	200-210mm	200-210mm	200-210mm
LED Color Temperature:	6000K	4000K	3000K	6000K	4000K	3000K
Driver:	Dimmable	Dimmable	Dimmable	Dimmable	Dimmable	Dimmable
Life Span:	40,000 hours	40,000 hours	40,000 hours	40,000 hours	40,000 hours	40,000 hours
Frame Colour:	White	White	White	White	White	White
Connection Included:	LED Driver, 0.6m lead and plug	LED Driver, 0.6m lead and plug	LED Driver, 0.6m lead and plug	LED Driver, 0.6m lead and plug	LED Driver, 0.6m lead and plug	LED Driver, 0.6m lead and plug
Operating Temperatures:	-20°C to 65°C	-20°C to 65°C	-20°C to 65°C	-20°C to 65°C	-20°C to 65°C	-20°C to 65°C
CRI:	>80	>80	>80	>80	>80	>80
Power Factor:	>0.90	>0.90	>0.90	48	48	48
Voltage:	AC230V	AC230V	AC230V	AC200-265V	AC200-265V	AC200-265V
Warranty:	5 Years	5 Years	5 Years	5 Years	5 Years	5 Years
Carton Quantity:	24	24	24	48	48	48

* : The actual effects of the lumen output will depend on the application and environment, replacement wattage is approximate.
Note: IC-F / IC-4 rated downlights, can be covered and abutted with building materials which can be safely exposed to temperatures of up to 90˚C.

CLICK HERE TO: ORDER | REQUEST FURTHER INFO | DOWNLOAD PHOTOMETRIC DATA

NEDLANDS GROUP

Free Call 1800 909 306
Fax +61 3 8669 4097
Website nedlandsgroup.com.au
Sales sales@nedlandsgroup.com.au
Service service@nedlandsgroup.com.au